


P1634 CDMA COLINEAR STAINLESS STEEL ELEVATED FEED

**PACIFIC
AERIALS**



P1634

- Covers the range 825-890MHz at less than 1.5:1 VSWR
- Ground plane independent
- Rugged, durable antenna suitable for Police, Fire, Ambulance and Emergency Service applications
- Simple plug and play installation
- Wide choice of installation mounts and brackets
- Interchangeable with P1624 if a smaller, lower gain antenna is needed
- The mounts are terminated with a FastFit jack, which provides a screw-on connection to all common radio communications connectors



P1212
FASTFIT
JACK

	P1634
Frequency	825 -890MHz
Antenna Type	Colinear Elevated Feed
Gain	6.5dBi
Typical VSWR	< 1.5:1
Radiation Pattern	Omni - directional
Polarisation	Vertical
Power Rating	100W
Impedance	50 ohms
DC Meter Reading	Open Circuit
Antenna	Stainless Steel
Elevated Feed	316 Stainless Steel
Ferrule & Mount	Glass filled nylon
Mounting Hole Size	16mm
Height / Weight	490mm/195g
Cable (on P1611/2/8 or P1505 mounts)	5m RG-58AU
Cable (on P1615 or P1508 mounts)	0.5m RG-174
Cable (on P1614 mount)	3m RG-174


MOUNTS FOR P1634




P1611 OR
P1615



P1612



P1614 OR
P1618



P1505 OR
P1508

BRACKETS



P1082B



P1103



P2023




P2024



P2029

VSWR GRAPH

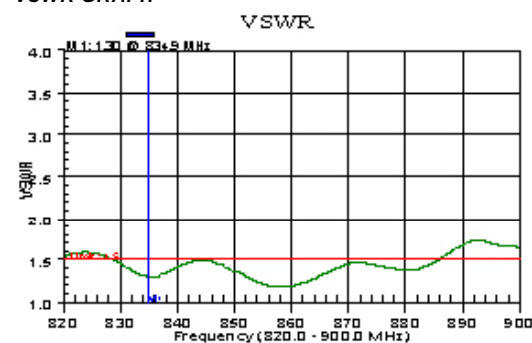

Resolution: 130
Date: 10/11/2004
Model: 5332C

ICAL: ON(COAX)
Time: 11:30:40
Serial #: 00212033

CW: OFF

18.01.10



PACIFIC AERIALS

11 B Ra Ora Drive East Tamaki 2013
PO Box 38 421 Howick 21245
Auckland New Zealand

PHONE: +64-9-253 9450
FAX: +64-9-271 6483
EMAIL: info@pacificaerials.com
WEB: www.pacificaerials.com